


DimmerRack

www.DimmerRack.com Unique Items for the Audio & Lighting Professional

RackWall Edison Panels

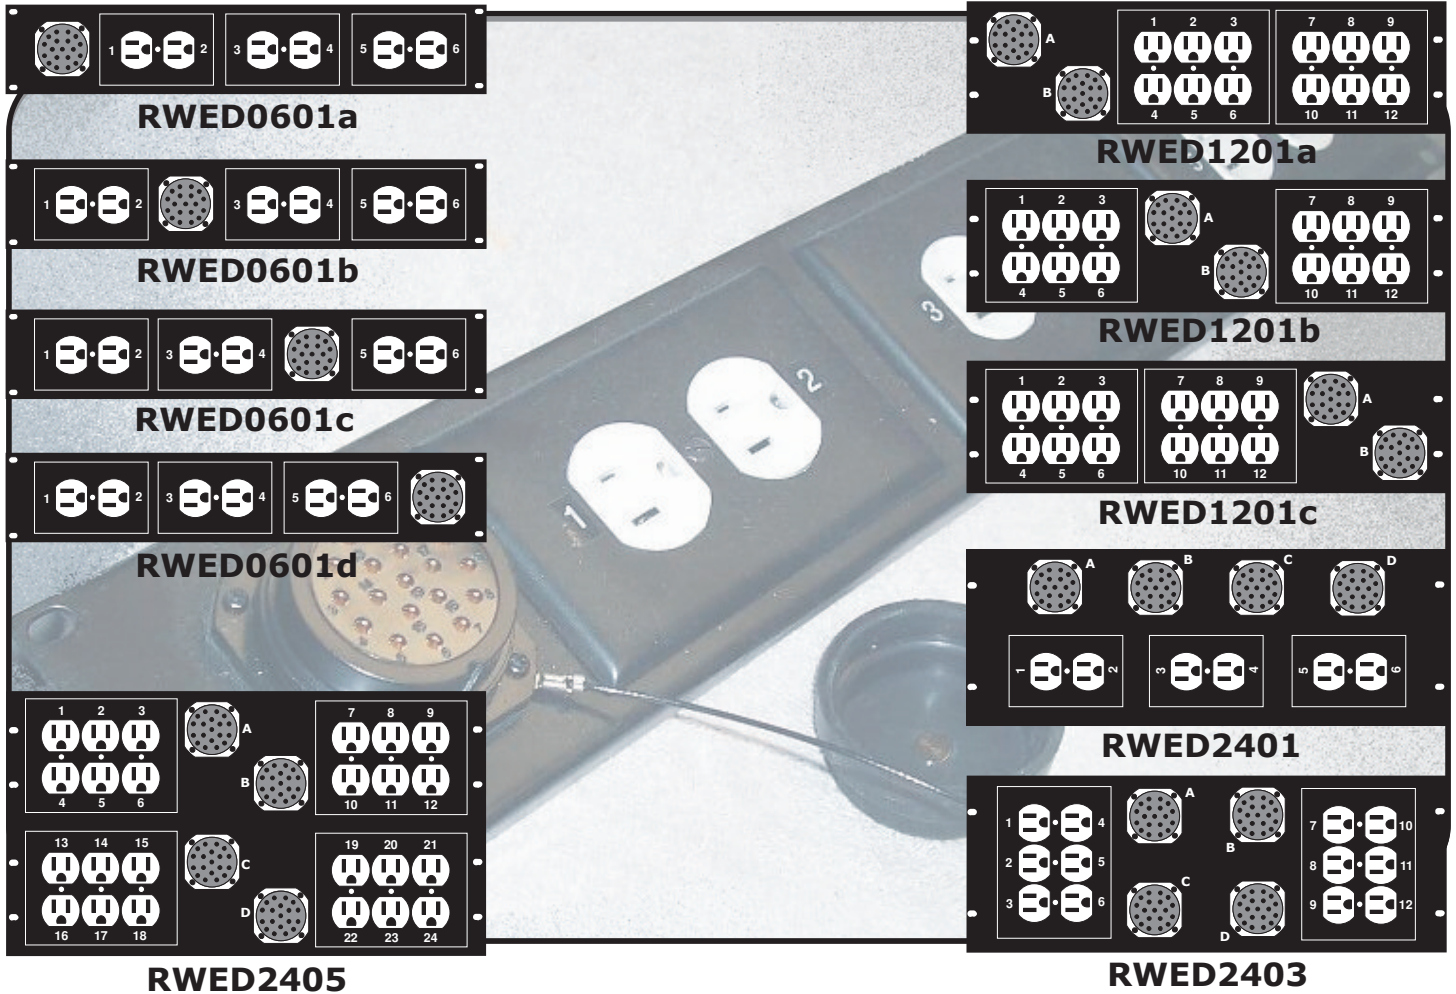

All Rackwall Edison Panel Assemblies use standard 19pin "All Black" Multi Connectors. Assemblies are wired in accordance with industry standard pinout. Multi connectors utilize standard soldering joints with heat shrink tubing for safety. Wiring is typically a 12g thhn (unless otherwise specified). Cable Lengths are typically 36". Wire is wire tied to panel as a strain relief. Assemblies are available with panel mounted Neutral and Ground Buss bars for custom applications.

Leviton 5320 U-Ground connectors can be "hardwired" directly to Multipin or wired separately. A multitude of wiring configurations is available.

Panels are available unterminated or using various output connectors ranging from industry standard U-ground, 2P&G Stage Pin connectors and a variety of 3pin twistlock devices.

Panels available in 24 circuit, 30cir, 36cir, 48cir, 60cir, 72cir and 96cir. Multi connectors are labeled on front and back of panel. Wiring is color coded to indicate circuit number.