


# DimmerRack

www.DimmerRack.com Unique Items for the Audio & Lighting Professional

## Soca Breaker Panel Assemblies

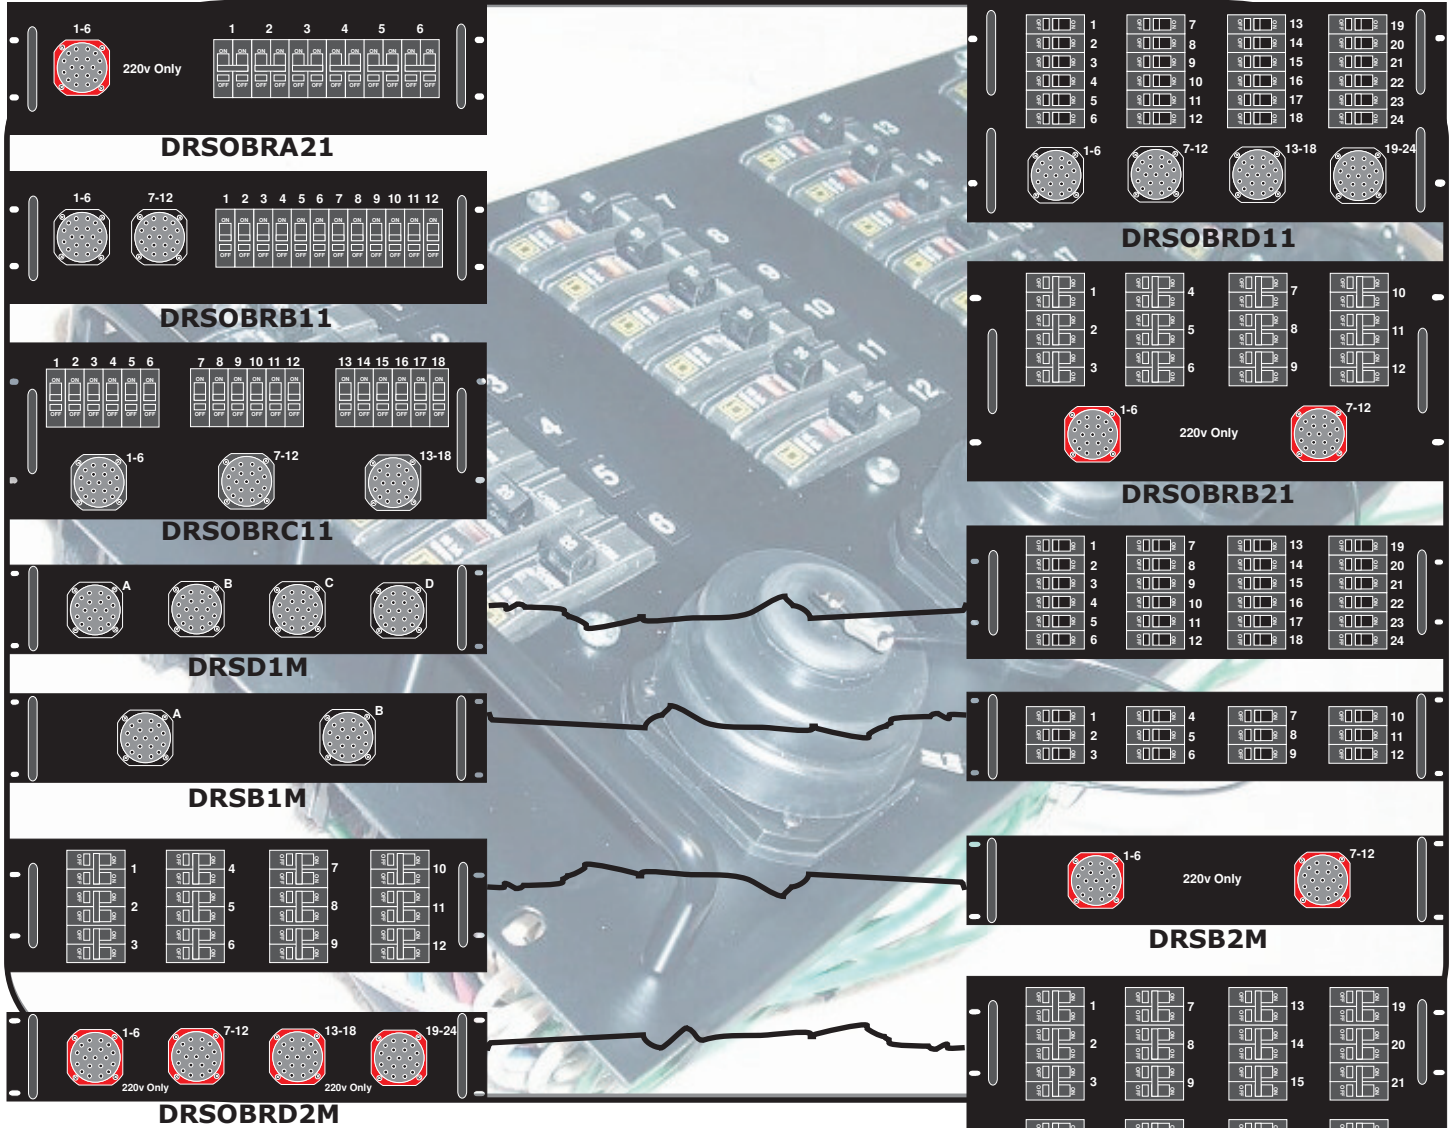

All Soca Breaker Panel Assemblies use standard 19pin Multi Connectors. Soca connectors are wired in accordance with industry standard pinout. Multi connectors utilize standard soldering joints with heat shrink tubing for safety.

Breaker assemblies use Square D breakers and are wired using a standard 12g thhn (Black, Red, Blue, White, Green). Four color wiring available for single phase systems. Wire leads are typically 36". Assemblies are available with panel mounted Neutral and Ground Buss bars.

"Monitor Mix" style panels separate the breakers from the outputs. Breaker panels bolt to the front of the rack while the output panel bolts to the rear. A 24" cable harness connects the two panels.

220v panels use 2 pole 20a breakers. Soca Pinout is wired Hot, Hot, Ground.

www.DimmerRack.com Redford, MI 48239 (734) 323-8916