


DimmerRack


www.DimmerRack.com Unique Items for the Audio & Lighting Professional

Cam Panel Assemblies

SINGLE PHASE

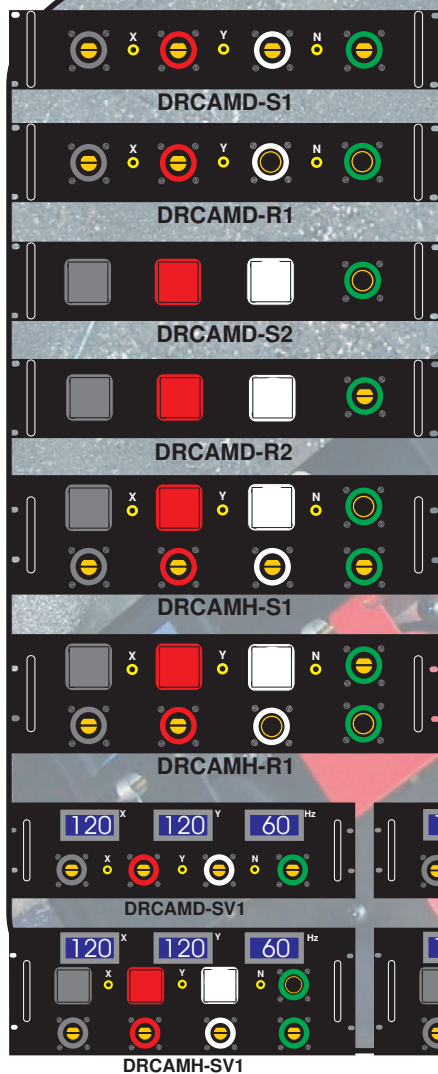

THREE PHASE

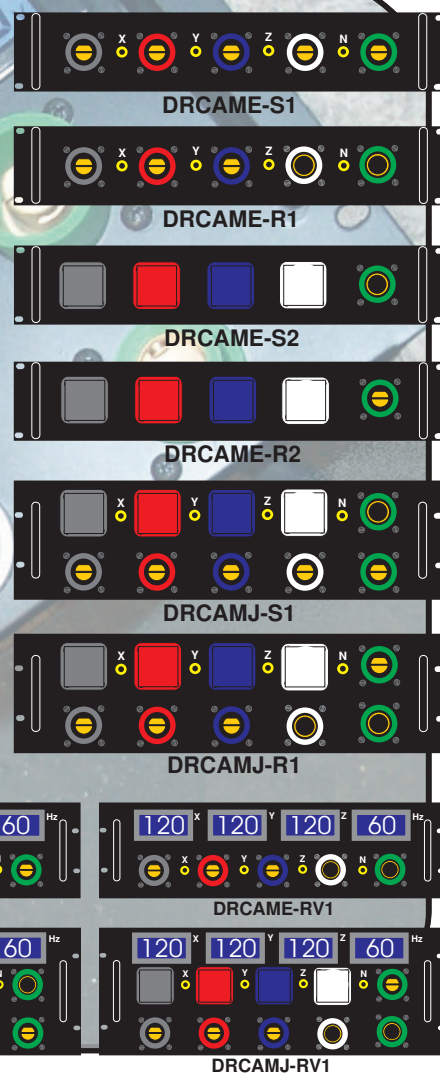

METER PANELS

All Non Pass-Thru Camlock panels use Male Panel Mount or Female (Reverse Neutral & Ground) rated at 400a. Connectors have a 1/2" threaded stud for client supplied Cam Taps.

All add-on Pass-Thru Camlock panels use Male & Female Panel Mount connectors. 1/2" threaded stud connectors for client supplied Cam Taps. Snap back covers are provided on pass thru Hot leads & Neutral.

All Input/Pass-Thru Camlock panels use Male & Female 1/2" threaded stud panel mount connectors. Connectors have a 1/2" threaded stud for client supplied Cam Taps. Snap back covers are provided on pass thru Hot leads & Neutral.

Cam Taps Optional Cam Tap terminations now range from simple tapping lug to "Distro Block" terminal bar straps. Cam taps are sold separately and provided in various combinations for both single phase and three phase panels.

1/4" test leads(external metering) provided on all panels. Test leads are connected directly to Black, Red, Blue and White connectors. Ground Cam is attached directly to mounting hardware. Voltage meters connect directly to Black, Red and Blue Cams. Hertz meter is directly connected to Black Cam. Meters are self adjustable for calibration. Panels have "Satin Black" finish and handles. Rack screws included.